


Your Information Pack

You will find below the content of your information pack, it gathers all information you will need to buy the right tire for your vehicle.

Here is the information from michelin.co.za on your tyre search for :

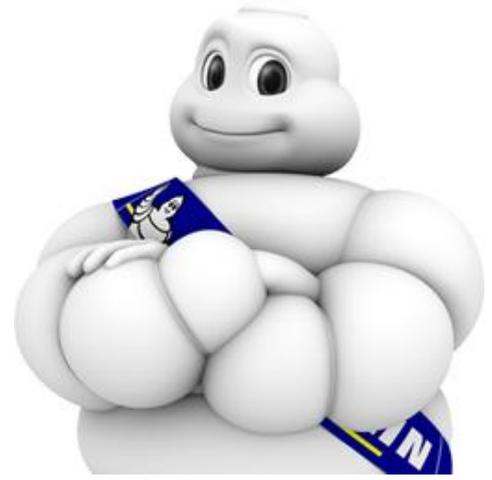

Your selected tyre



MICHELIN PILOT SPORT 4

Passenger Car/Minivan

From Mind to Road. Instantly.

Latest Generation

Grip&Handling

Longevity



Key benefits



Delivering a tyre that covers all your needs.

Tyres have their own personality: they need to express certain characteristics more passionately. With MICHELIN Total Performance, you get all characteristics on top, without any compromise. All our tyres are made to cover all your need, thanks to MICHELIN Total Performance.

Excellent steering control and high level of reactivity

Inspired by Michelin successful motorsports experience in World Endurance Championship and World Rally Championship. The MICHELIN Pilot Sport tyreline is co-designed with the most demanding manufacturers such as BMW, Mercedes, Audi and Porsche.

The best in dry and wet braking

Up to 0.5 meters shorter braking distance on dry roads.
Up to 0.3 meters shorter braking distance on wet roads.

Michelin's excellence in longevity

2,000km extra mileage on average. Michelin Pilot Sport 4 vs. Michelin Pilot Sport 3. Tests carried out by DEKRA Test Center in April 2015 with 225/45-17 94Y/W XL tires and in July 2015 with 225/40-18 92Y XL tires.

Keep in mind

You will find below some helpful questions to ask your dealer :

- If the tyre you've selected is not immediately available at your dealer, you can always ask them to order it. It may be available in just 1 – 2 days.
- Remember that a good price is not always a good value : a tyre that lasts longer, helps you save on fuel, and keeps you safe in every condition is a better value in the long run.

The sizes shown are average design values for tyres measured on specified measuring rim widths. Some tyres may vary from this value by +/-3% of the section height (affecting overall diameter), and +/-4% of the section width. Section width varies approximately 0.2" (5mm) for every 0.5" change in rim width. Tread patterns are often tuned to accommodate different tyre widths. Tyres for a particular dimension of a given tyre line may vary in appearance from the tyre shown in the photograph. **WARNING:** Serious or fatal injury may result from tyre failure due to underinflation or overloading. To ensure correct air pressure and vehicle load, refer to vehicle owner's manual or tyre information placard on the vehicle. Serious injury or death may result from explosion of tyre/rim assembly due to improper mounting. Only tyre professionals should mount tyres and they should never inflate beyond 2.8 bar to seat the beads. Before mixing types of tyres in any configuration on any vehicle, be sure to check the vehicle owner's manual for its recommendations. **DANGER:** Never mount a 16" diameter tire on a 16.5" rim. **DANGER:** Never mount a 17" diameter tire on a 17.5" rim. Inflation pressure increase must not exceed the maximum pressure branded on the tyre sidewall. When a customer requests a replacement tyre with a lower speed rating than the original equipment tyre, you must clearly communicate to him or her that the handling of the vehicle may be different, and that its maximum speed capability is limited to that of the lowest speed-rated tyre on the vehicle. Exceeding the lawful speed limit is neither recommended nor endorsed.